

Item description/product images



Material	Note	highest endurance times in dry run	for high loads	for high temperatures	for higher/ high speed	dirt- resistant	chemical- resistant	low water absorption	good for edge pressing	possible under water	anti- effluents	electrically conductive
iglidur® G	the all-rounder	•	•			•						•
iglidur® J	low coefficients of friction	•			•			•	•			
iglidur® X	temperature and chemical resistant	•	•	•			•	•		•		•

Description

Material:

High-performance polymer iglidur® G, iglidur® J or iglidur® X.

Version:

iglidur® G grey;
iglidur® J yellow;
iglidur® X black

Note:

Plastic high-performance polymer plain bearings.



- maintenance-free
- lubricant-free
- corrosion-resistant
- resistant to dirt
- high dimensional precision
- high pressure resistance
- good heat dissipation
- very low creep tendencies
- high mechanical damping
- resistant to UV radiation.

Assembly:

The bearings are designed for press fits in H7 bores. After pressing in, the ID of the bearing will be diameter D with the relative tolerance.

The bearings are suitable for shafts with h tolerance (recommended min. h9).

Drawings

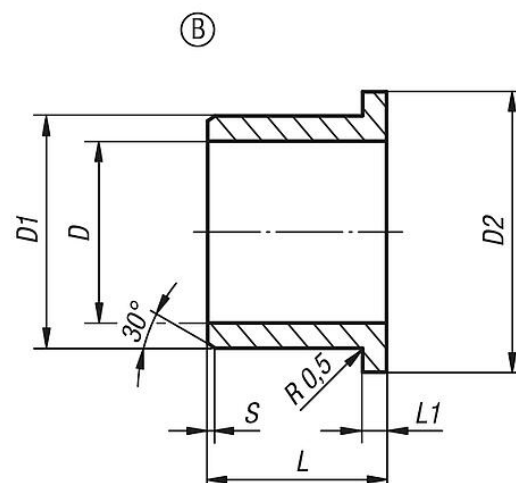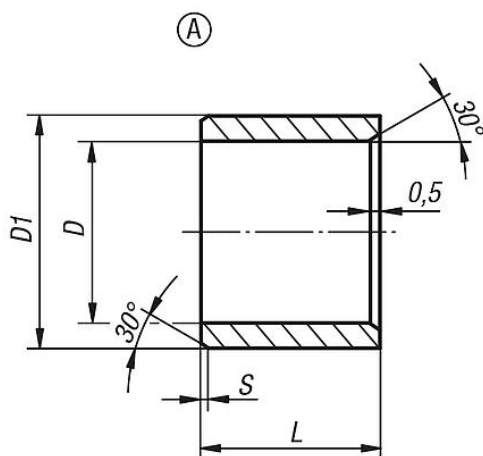

Overview of items

iglidur® G bearings

Overview of items

Order No.	Form	Version 2	D	D1	D2	L	L1	S	Tolerance D after force fitting	Max. permissible static surface pressure N/mm ²	Temperature range
23710-11050705	A	oval	5	7	-	5	-	0,3	E10	80	12,4
23710-11060806	A	oval	6	8	-	6	-	0,5	E10	80	12,4
23710-11081008	A	oval	8	10	-	8	-	0,5	E10	80	12,4
23710-11101210	A	oval	10	12	-	10	-	0,5	E10	80	12,4
23710-11121410	A	oval	12	14	-	10	-	0,8	E10	80	12,4
23710-11141615	A	oval	14	16	-	15	-	0,8	E10	80	12,4
23710-11151720	A	oval	15	17	-	20	-	0,8	E10	80	12,4
23710-11161820	A	oval	16	18	-	20	-	0,8	E10	80	12,4
23710-11202320	A	oval	20	23	-	20	-	0,8	E10	80	12,4
23710-11252820	A	oval	25	28	-	20	-	0,8	E10	80	12,4
23710-11303430	A	oval	30	34	-	30	-	0,8	E10	80	12,4
23710-21050705	A	outside M8/inside M6	5	7	-	5	-	0,3	E10	35	flat
23710-21060806	A	outside M8/inside M6	6	8	-	6	-	0,5	E10	35	flat
23710-21081008	A	outside M8/inside M6	8	10	-	8	-	0,5	E10	35	flat
23710-21101210	A	outside M8/inside M6	10	12	-	10	-	0,5	E10	35	flat
23710-21121410	A	outside M8/inside M6	12	14	-	10	-	0,8	E10	35	flat
23710-21141615	A	outside M8/inside M6	14	16	-	15	-	0,8	E10	35	flat
23710-21151720	A	outside M8/inside M6	15	17	-	20	-	0,8	E10	35	flat
23710-21161820	A	outside M8/inside M6	16	18	-	20	-	0,8	E10	35	flat
23710-21202320	A	outside M8/inside M6	20	23	-	20	-	0,8	E10	35	flat
23710-21252820	A	outside M8/inside M6	25	28	-	20	-	0,8	E10	35	flat
23710-21303430	A	outside M8/inside M6	30	34	-	30	-	0,8	E10	35	flat
23710-31050705	A	Outrigger	5	7	-	5	-	0,3	F10	150	flat
23710-31060806	A	Outrigger	6	8	-	6	-	0,5	F10	150	flat
23710-31081008	A	Outrigger	8	10	-	8	-	0,5	F10	150	flat
23710-31101210	A	Outrigger	10	12	-	10	-	0,5	F10	150	flat
23710-31121410	A	Outrigger	12	14	-	10	-	0,8	F10	150	flat
23710-31141615	A	Outrigger	14	16	-	15	-	0,8	F10	150	flat
23710-31151720	A	Outrigger	15	17	-	20	-	0,8	F10	150	flat
23710-31161820	A	Outrigger	16	18	-	20	-	0,8	F10	150	flat
23710-31202320	A	Outrigger	20	23	-	20	-	0,8	F10	150	flat
23710-31252820	A	Outrigger	25	28	-	20	-	0,8	F10	150	flat
23710-31303430	A	Outrigger	30	34	-	30	-	0,8	F10	150	flat
23710-12050705	B	oval	5	7	11	5	1	0,3	E10	80	12,4
23710-12060808	B	oval	6	8	12	8	1	0,5	E10	80	12,4
23710-12081007	B	oval	8	10	15	7,5	1	0,5	E10	80	12,4
23710-12101209	B	oval	10	12	18	9	1	0,5	E10	80	12,4
23710-12121412	B	oval	12	14	20	12	1	0,8	E10	80	12,4
23710-12141612	B	oval	14	16	22	12	1	0,8	E10	80	12,4
23710-12151712	B	oval	15	17	23	12	1	0,8	E10	80	12,4
23710-12161817	B	oval	16	18	24	17	1	0,8	E10	80	12,4
23710-12202321	B	oval	20	23	30	21	1,5	0,8	E10	80	12,4
23710-12252821	B	oval	25	28	35	21	1,5	0,8	E10	80	12,4
23710-12303426	B	oval	30	34	42	26	2	0,8	E10	80	12,4
23710-22050705	B	outside M8/inside M6	5	7	11	5	1	0,3	E10	35	flat
23710-22060808	B	outside M8/inside M6	6	8	12	8	1	0,5	E10	35	flat
23710-22081007	B	outside M8/inside M6	8	10	15	7	1	0,5	E10	35	flat
23710-22101209	B	outside M8/inside M6	10	12	18	9	1	0,5	E10	35	flat
23710-22121412	B	outside M8/inside M6	12	14	20	12	1	0,8	E10	35	flat
23710-22141612	B	outside M8/inside M6	14	16	22	12	1	0,8	E10	35	flat
23710-22151712	B	outside M8/inside M6	15	17	23	12	1	0,8	E10	35	flat
23710-22161817	B	outside M8/inside M6	16	18	24	17	1	0,8	E10	35	flat
23710-22202321	B	outside M8/inside M6	20	23	30	21	1,5	0,8	E10	35	flat
23710-22252821	B	outside M8/inside M6	25	28	35	21	1,5	0,8	E10	35	flat
23710-22303426	B	outside M8/inside M6	30	34	42	26	2	0,8	E10	35	flat
23710-32050705	B	Outrigger	5	7	11	5	1	0,3	F10	150	flat
23710-32060808	B	Outrigger	6	8	12	8	1	0,5	F10	150	flat
23710-32081007	B	Outrigger	8	10	15	7,5	1	0,5	F10	150	flat
23710-32101209	B	Outrigger	10	12	18	9	1	0,5	F10	150	flat
23710-32121412	B	Outrigger	12	14	20	12	1	0,8	F10	150	flat
23710-32141612	B	Outrigger	14	16	22	12	1	0,8	F10	150	flat
23710-32151712	B	Outrigger	15	17	23	12	1	0,8	F10	150	flat
23710-32161817	B	Outrigger	16	18	24	17	1	0,8	F10	150	flat
23710-32202321	B	Outrigger	20	23	30	21	1,5	0,8	F10	150	flat

Overview of items

Order No.	Form	Version 2	D	D1	D2	L	L1	S	Tolerance D after force fitting	Max. permissible static surface pressure N/mm ²	Temperature range
23710-32252821	B	Outrigger	25	28	35	21	1,5	0,8	F10	150	flat
23710-32303426	B	Outrigger	30	34	42	26	2	0,8	F10	150	flat