


Item description/product images

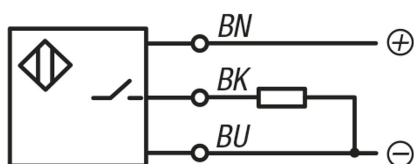

Description

Material:

Housing stainless steel or nickel-plated brass.
Active face PBT or PA 12.

Version:

Voltage: $U = 10 - 30 \text{ V DC}$
Function: Normally open
Switch type: PNP
Mounting type: flush
Security type: IP 67

Note:

Non-contact, wear-free operation. High switching frequency and switch accuracy.
Non-sensitive to vibration, dust and moisture. Inductive sensors register all metals without contact.

Short-circuit and reverse-polarity proof.

Temperature range:

$-25 \text{ }^{\circ}\text{C}$ to $+70 \text{ }^{\circ}\text{C}$.

Safety:

This product is not suited as a sensor for the personal protection.

Drawing reference:

1) LED-indicator


P = cable length

BN = brown

BK = black

BU = blue

Drawings

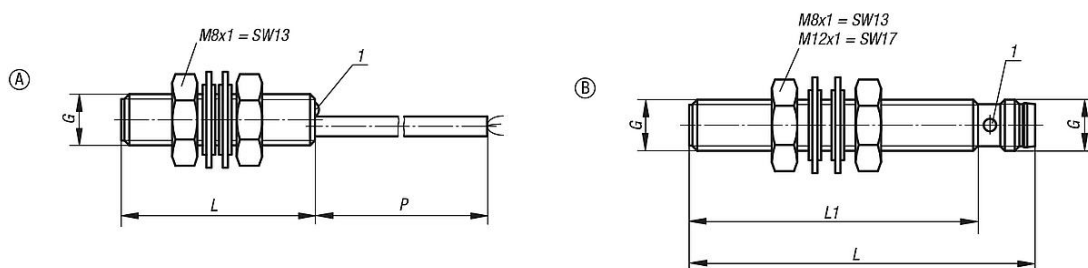

Overview of items

Order No.	Main material	Form	G	L	L1	P	material active surface	switching distance S_n (mm)	current I max. (mA)	switching frequency f (Hz)	connection type	No. of conductors x conductor cross-section
83000-10-010X5000	stainless steel	A	M8x1	30	-	5000	PBT	1,5	200	3000	PUR cable	3 x 0,14 mm ²
83000-10-020	stainless steel	B	M8x1	45	34,5	-	PBT	2	200	1500	connector	3
83000-10-030	stainless steel	B	M8x1	55	44,5	-	PBT	2	200	1500	connector	3
83000-10-040	brass	B	M8x1	59	50	-	PA 12	1,5	200	1000	connector	3
83000-10-050	brass	B	M8x1	59	50	-	PA 12	2	200	700	connector	3
83000-10-060	brass	B	M12x1	65	50	-	PA 12	2	200	1200	connector	3

Overview of items

Order No.	Main material	Form	G	L	L1	P	material active surface	switching distance Sn (mm)	current I max. (mA)	switching frequency f (Hz)	connection type	No. of conductors x conductor cross-section
83000-10-070	brass	B	M12x1	65	50	-	PA 12	4	200	500	connector	3