

Item description/product images



**Description**

**Material:**

Grip and push button 1.4305 stainless steel.  
 Pin 1.4305 stainless steel.  
 Balls 1.4125 stainless steel.  
 Spring and hanger 1.4310 stainless steel wire.

**Version:**

Bright.

**Note:**

Ball lock pins are used for easy fastening or joining of components. The two balls are disengaged by pressing the push button and the pin can be slipped into holes in the workpieces. When the push button is released, the balls lock the connection securely.

Shear force double shear (F) = S · τ aB max.

The values given for the shear force are the theoretical breaking load. These are non-binding reference values without consideration of safety factors and exclude any liability. The values given are for information purposes only and do not constitute a legally binding assurance of properties.

The load values have been calculated in accordance with DIN 50141. Each user must determine individually whether the ball lock pin is suitable for the respective application.

Different materials in which the ball lock pins are used, weather conditions and wear can influence the determined values.

**Advantages:**

Wide connections possible.  
 The pin length does not need to be coordinated with the component width.


**On request:**

Other pin lengths.

**Accessory:**

Locating bushes for ball lock pins with head-end lock 03425.

Drawings

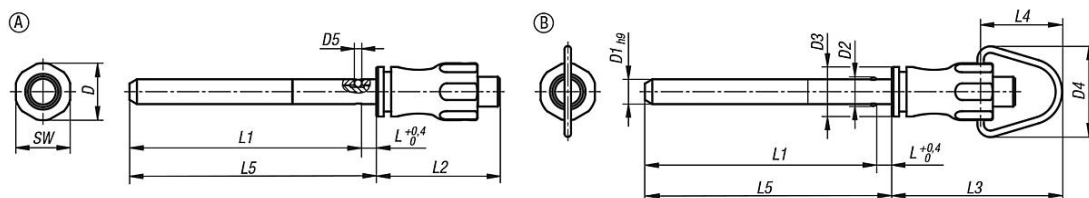

Overview of items

Order No.	Form	D	D1	D2	D3	D4	D5	L	L1	L2	L3	L4	L5	SW	Receiving hole H11	Shearing force double shear max.kN
03415-10-001205050	A	11,5	5	5,5	10	-	1,5	3	47	25	-	-	50	11	5	10

## Overview of items

Order No.	Form	D	D1	D2	D3	D4	D5	L	L1	L2	L3	L4	L5	SW	Receiving hole H11	Shearing force double shear max.kN
03415-10-001205100	A	11,5	5	5,5	10	-	1,5	3	97	25	-	-	100	11	5	10
03415-10-001205150	A	11,5	5	5,5	10	-	1,5	3	147	25	-	-	150	11	5	10
03415-10-001206050	A	11,5	6	6,85	10	-	2	3	47	25	-	-	50	11	6	14
03415-10-001206100	A	11,5	6	6,85	10	-	2	3	97	25	-	-	100	11	6	14
03415-10-001206150	A	11,5	6	6,85	10	-	2	3	147	25	-	-	150	11	6	14
03415-10-001508100	A	15,5	8	9,5	13,5	-	3	3,5	96,5	33	-	-	100	15	8	26
03415-10-001508150	A	15,5	8	9,5	13,5	-	3	3,5	146,5	33	-	-	150	15	8	26
03415-10-001508200	A	15,5	8	9,5	13,5	-	3	3,5	196,5	33	-	-	200	15	8	26
03415-10-001510100	A	15,5	10	12	13,5	-	4	3,5	96,5	33	-	-	100	15	10	40
03415-10-001510150	A	15,5	10	12	13,5	-	4	3,5	146,5	33	-	-	150	15	10	40
03415-10-001510200	A	15,5	10	12	13,5	-	4	3,5	196,5	33	-	-	200	15	10	40
03415-10-002112150	A	22	12	14,5	20	-	4,5	3,5	146,5	39,5	-	-	150	21	12	57
03415-10-002112200	A	22	12	14,5	20	-	4,5	3,5	196,5	39,5	-	-	200	21	12	57
03415-10-002112250	A	22	12	14,5	20	-	4,5	3,5	246,5	39,5	-	-	250	21	12	57
03415-10-002116150	A	22	16	19	20	-	6,5	4	146	39,5	-	-	150	21	16	100
03415-10-002116200	A	22	16	19	20	-	6,5	4	196	39,5	-	-	200	21	16	100
03415-10-002116250	A	22	16	19	20	-	6,5	4	246	39,5	-	-	250	21	16	100
03415-10-101205050	B	11,5	5	5,5	10	18,3	1,5	3	47	25	34,6	16,6	50	11	5	10
03415-10-101205100	B	11,5	5	5,5	10	18,3	1,5	3	97	25	34,6	16,6	100	11	5	10
03415-10-101205150	B	11,5	5	5,5	10	18,3	1,5	3	147	25	34,6	16,6	150	11	5	10
03415-10-101206050	B	11,5	6	6,85	10	18,3	2	3	47	25	34,6	16,6	50	11	6	14
03415-10-101206100	B	11,5	6	6,85	10	18,3	2	3	97	25	34,6	16,6	100	11	6	14
03415-10-101206150	B	11,5	6	6,85	10	18,3	2	3	147	25	34,6	16,6	150	11	6	14
03415-10-101508100	B	15,5	8	9,5	13,5	24	3	3,5	96,5	33	46,7	22,7	100	15	8	26
03415-10-101508150	B	15,5	8	9,5	13,5	24	3	3,5	146,5	33	46,7	22,7	150	15	8	26
03415-10-101508200	B	15,5	8	9,5	13,5	24	3	3,5	196,5	33	46,7	22,7	200	15	8	26
03415-10-101510100	B	15,5	10	12	13,5	24	4	3,5	96,5	33	46,7	22,7	100	15	10	40
03415-10-101510150	B	15,5	10	12	13,5	24	4	3,5	146,5	33	46,7	22,7	150	15	10	40
03415-10-101510200	B	15,5	10	12	13,5	24	4	3,5	196,5	33	46,7	22,7	200	15	10	40
03415-10-102112150	B	22	12	14,5	20	33	4,5	3,5	146,5	39,5	59,3	30,3	150	21	12	57
03415-10-102112200	B	22	12	14,5	20	33	4,5	3,5	196,5	39,5	59,3	30,3	200	21	12	57
03415-10-102112250	B	22	12	14,5	20	33	4,5	3,5	246,5	39,5	59,3	30,3	250	21	12	57
03415-10-102116150	B	22	16	19	20	33	6,5	4	146	39,5	59,3	30,3	150	21	16	100
03415-10-102116200	B	22	16	19	20	33	6,5	4	196	39,5	59,3	30,3	200	21	16	100
03415-10-102116250	B	22	16	19	20	33	6,5	4	246	39,5	59,3	30,3	250	21	16	100