


Item description/product images

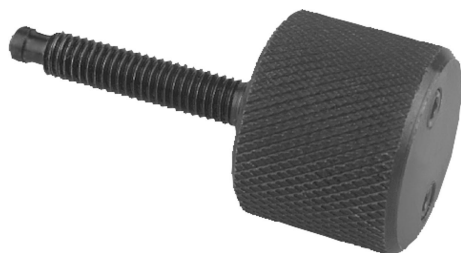

Description

Material:

Steel.

Version:

Black oxidised.


Note:

The torque required for the knurled screw is generated by two spring-mounted thrust balls.


As soon as the adjustable final pressure is reached, the grip runs free.

The final pressure is set using the set screws located in the head.

These torque screws are particularly useful when used together with thrust pads (07138, 07140 or 07141) for clamping sloping surfaces.

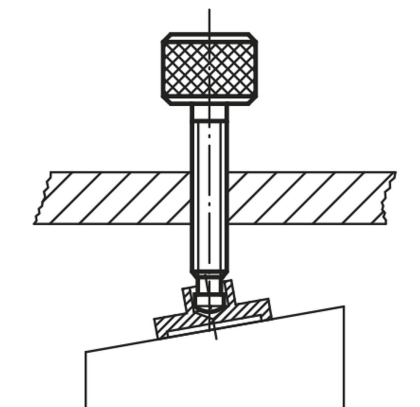

Drawings

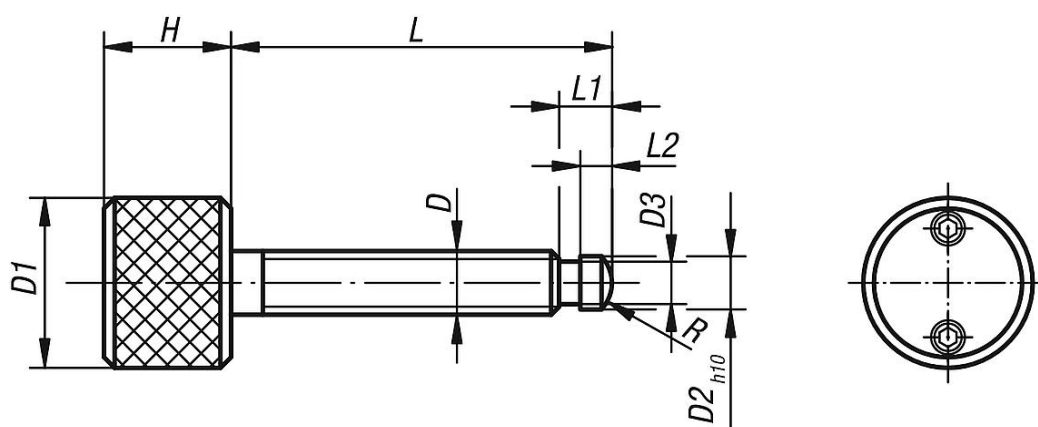

Overview of items

Order No.	D	D1	D2	D3	H	L	L1	L2	F1 N	F2 N	R
07134-06X	M6	25	4,5	4,1	20	40/60	6	2,5	40	800	3
07134-08X	M8	25	6	5,3	20	60/80	7,5	3	40	650	5
07134-10X	M10	25	8	7,2	20	60/80	9	4,5	40	550	6
07134-12X	M12	25	8	7,2	20	80/100	10	4,5	40	450	6