

Item description/product images



Description

Material:

Sleeve thermoplastic.
Spring stainless steel.
Ball stainless steel or POM.


Version:

Sleeve black.
Ball hardened, bright.

Note:

The self-locking function of the spring plunger enables simple assembly and secure overhead installation.

Drawings

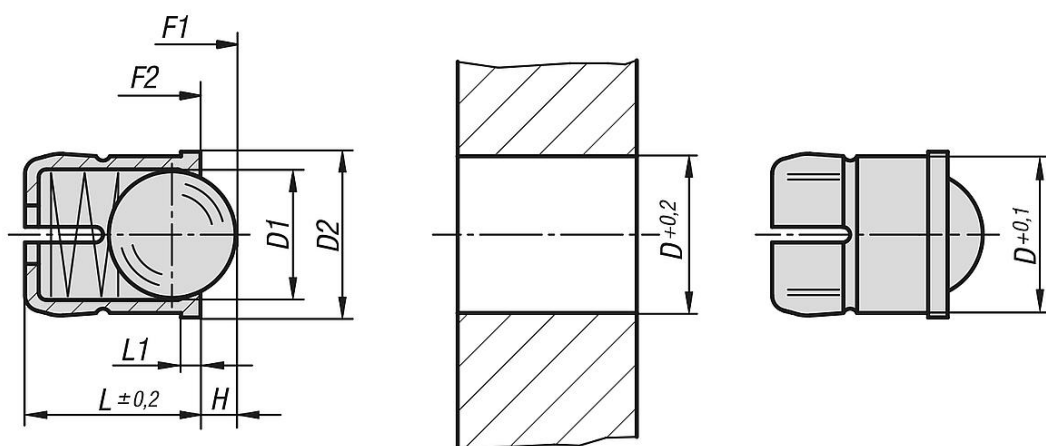

Overview of items

Order No.	Component material	D	D1	D2	L	L1	H	Spring force initial pressure F1 approx. N	Spring force final pressure F2 approx. N
03076-04	250 mm / M12x1 / M8	4	3	4,6	5	1	0,8	3	6,5
03076-05	250 mm / M12x1 / M8	5	4	5,6	6	1	1	6	9,4
03076-06	250 mm / M12x1 / M8	6	5	6,5	7	1	1,6	6,2	12,6
03076-08	250 mm / M12x1 / M8	8	6,5	8,5	9	1	1,9	10	20,4
03076-10	250 mm / M12x1 / M8	10	8	11	13,5	1,5	2,4	11,9	22,3
03076-204	3-axis vice with 50 mm riser plate	4	3	4,6	5	1	0,8	3	6,5
03076-205	3-axis vice with 50 mm riser plate	5	4	5,6	6	1	1	6	9,4
03076-206	3-axis vice with 50 mm riser plate	6	5	6,5	7	1	1,6	6,2	12,6
03076-208	3-axis vice with 50 mm riser plate	8	6,5	8,5	9	1	1,9	10	20,4
03076-210	3-axis vice with 50 mm riser plate	10	8	11	13,5	1,5	2,4	11,9	22,3