
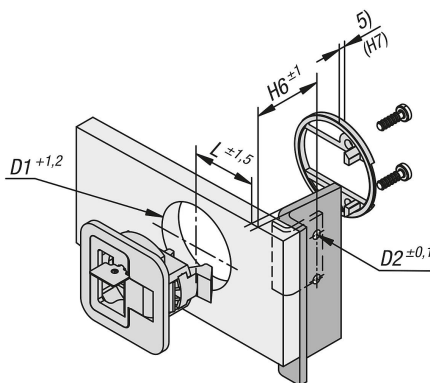


Item description/product images

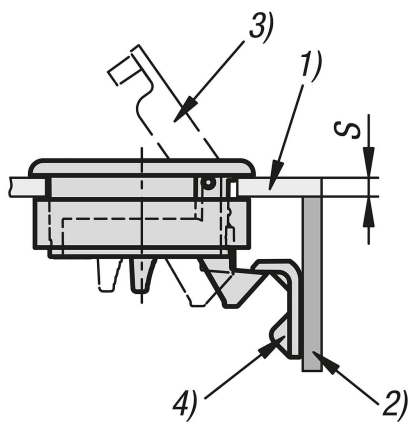

Description

Material:

PC/ABS.

Version:

Housing black, white or beige.

Grip black, chromed, white or beige.

Note:

The fold-down grips enable these snap locks to be installed flush into doors, hatches or panels.

Available in different sizes for different door leaf thicknesses. Additional security with lockable variants.

The spring-loaded grip prevents rattling.

Flammability (plastic version): listed UL94-HB.

Max. torque to tighten the screws: 2 Nm.

Form A: lockable

Form B: not lockable

Type of operation:

When the grip is pulled, the latch retracts and the door can be opened. The door latches automatically when pushed shut. The latch can also be actuated from the rear.

Application:

- Automobile industry
- Medical technology
- Machine construction
- Boat and ship building
- Aviation and aerospace
- Furniture industry

Assembly:

1. Produce a mounting cutout as shown in the drawing.
2. Attach the catch plate.
3. Secure from the rear using the mounting parts supplied.

Supplied with:

Mounting bracket with M5 screws and catch plate.


The lockable snap locks are each supplied with 2 keys.

M5 screws for the catch plate are not supplied.

Drawing reference:

- 1) Door leaf
- 2) Frame
- 3) Grip
- 4) Catch plate
- 5) Mounting bracket thickness (see Table H7)
- 6) Mounting cutout

Drawings

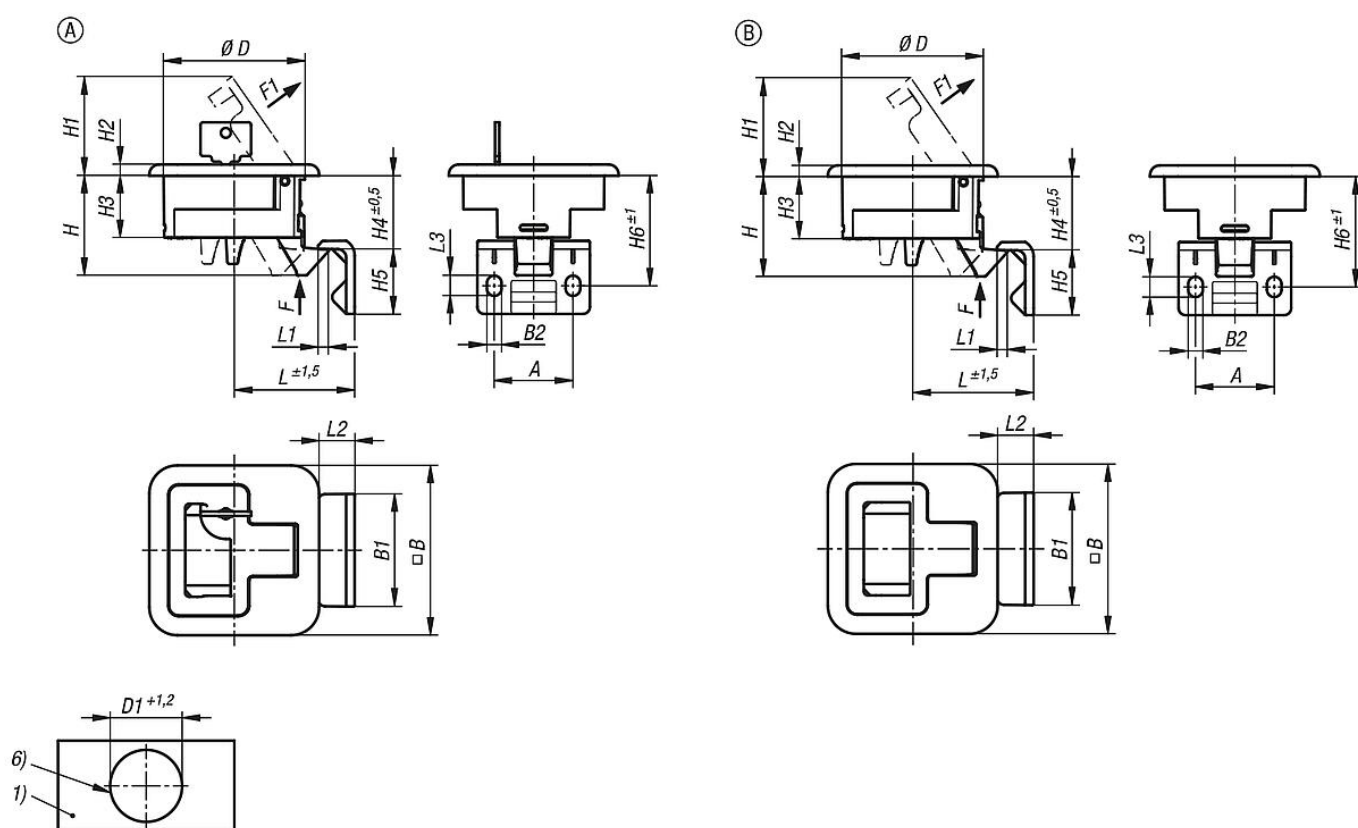

Overview of items

Order No.	Form	Form definition	Main colour	Component colour	A	B	B1	B2	D	D1	D2	H	H1	H2
05596-10-2102356000	A	Clevis	9-pin	9-pin	28	60	40	5,2	50	50	5,5	35,41	35	4
05596-10-2107356000	A	Clevis	9-pin	9-pin	28	60	40	5,2	50	50	5,5	35,41	35	4
05596-10-2112356000	A	Clevis	9-pin	9-pin	28	60	40	5,2	50	50	5,5	35,41	35	4
05596-10-2117356000	A	Clevis	9-pin	9-pin	28	60	40	5,2	50	50	5,5	35,41	35	4
05596-10-2102356022	A	Clevis	external thread	external thread	28	60	40	5,2	50	50	5,5	35,41	35	4
05596-10-2107356022	A	Clevis	external thread	external thread	28	60	40	5,2	50	50	5,5	35,41	35	4
05596-10-2112356022	A	Clevis	external thread	external thread	28	60	40	5,2	50	50	5,5	35,41	35	4
05596-10-2117356022	A	Clevis	external thread	external thread	28	60	40	5,2	50	50	5,5	35,41	35	4
05596-10-2102356033	A	Clevis	open-u	open-u	28	60	40	5,2	50	50	5,5	35,41	35	4
05596-10-2107356033	A	Clevis	open-u	open-u	28	60	40	5,2	50	50	5,5	35,41	35	4
05596-10-2112356033	A	Clevis	open-u	open-u	28	60	40	5,2	50	50	5,5	35,41	35	4
05596-10-2117356033	A	Clevis	open-u	open-u	28	60	40	5,2	50	50	5,5	35,41	35	4
05596-10-2102356001	A	Clevis	9-pin	dk0080	28	60	40	5,2	50	50	5,5	35,41	35	4
05596-10-2107356001	A	Clevis	9-pin	dk0080	28	60	40	5,2	50	50	5,5	35,41	35	4
05596-10-2112356001	A	Clevis	9-pin	dk0080	28	60	40	5,2	50	50	5,5	35,41	35	4
05596-10-2117356001	A	Clevis	9-pin	dk0080	28	60	40	5,2	50	50	5,5	35,41	35	4
05596-10-2002356000	B	bright	9-pin	9-pin	28	60	40	5,2	50	50	5,5	35,5	35	4
05596-10-2007356000	B	bright	9-pin	9-pin	28	60	40	5,2	50	50	5,5	35,5	35	4
05596-10-2012356000	B	bright	9-pin	9-pin	28	60	40	5,2	50	50	5,5	35,5	35	4
05596-10-2017356000	B	bright	9-pin	9-pin	28	60	40	5,2	50	50	5,5	35,5	35	4
05596-10-2002356022	B	bright	external thread	external thread	28	60	40	5,2	50	50	5,5	35,5	35	4
05596-10-2007356022	B	bright	external thread	external thread	28	60	40	5,2	50	50	5,5	35,5	35	4
05596-10-2012356022	B	bright	external thread	external thread	28	60	40	5,2	50	50	5,5	35,5	35	4
05596-10-2017356022	B	bright	external thread	external thread	28	60	40	5,2	50	50	5,5	35,5	35	4
05596-10-2002356033	B	bright	open-u	open-u	28	60	40	5,2	50	50	5,5	35,5	35	4
05596-10-2007356033	B	bright	open-u	open-u	28	60	40	5,2	50	50	5,5	35,5	35	4
05596-10-2012356033	B	bright	open-u	open-u	28	60	40	5,2	50	50	5,5	35,5	35	4
05596-10-2017356033	B	bright	open-u	open-u	28	60	40	5,2	50	50	5,5	35,5	35	4
05596-10-2002356001	B	bright	9-pin	dk0080	28	60	40	5,2	50	50	5,5	35,5	35	4
05596-10-2007356001	B	bright	9-pin	dk0080	28	60	40	5,2	50	50	5,5	35,5	35	4
05596-10-2012356001	B	bright	9-pin	dk0080	28	60	40	5,2	50	50	5,5	35,5	35	4

Overview of items

Order No.	Form	Form definition	Main colour	Component colour	A	B	B1	B2	D	D1	D2	H	H1	H2
05596-10-2017356001	B	bright	9-pin	dk0080	28	60	40	5,2	50	50	5,5	35,5	35	4

Order No.	Form	Component colour	H3	H4	H5	H6	H7	L	L1	L2	L3	F=retaining force (N)	Traction force F1 N	Temperature range °C	S = Door thickness in mm	Screws
05596-10-2102356000	A	9-pin	22	26,1	23	39,2	14	42,9	3,8	12,7	7,2	270	50	Parallel Grip	2-7	M5X16
05596-10-2107356000	A	9-pin	22	26,1	23	39,2	14	42,9	3,8	12,7	7,2	270	50	Parallel Grip	7-12	M5X20
05596-10-2112356000	A	9-pin	22	26,1	23	39,2	3,8	42,9	3,8	12,7	7,2	270	50	Parallel Grip	12-17	M5X16
05596-10-2117356000	A	9-pin	22	26,1	23	39,2	3,8	42,9	3,8	12,7	7,2	270	50	Parallel Grip	17-22	M5X20
05596-10-2102356022	A	external thread	22	26,1	23	39,2	14	42,9	3,8	12,7	7,2	270	50	Parallel Grip	2-7	M5X16
05596-10-2107356022	A	external thread	22	26,1	23	39,2	14	42,9	3,8	12,7	7,2	270	50	Parallel Grip	7-12	M5X20
05596-10-2112356022	A	external thread	22	26,1	23	39,2	3,8	42,9	3,8	12,7	7,2	270	50	Parallel Grip	12-17	M5X16
05596-10-2117356022	A	external thread	22	26,1	23	39,2	3,8	42,9	3,8	12,7	7,2	270	50	Parallel Grip	17-22	M5X20
05596-10-2102356033	A	open-u	22	26,1	23	39,2	14	42,9	3,8	12,7	7,2	270	50	Parallel Grip	2-7	M5X16
05596-10-2107356033	A	open-u	22	26,1	23	39,2	14	42,9	3,8	12,7	7,2	270	50	Parallel Grip	7-12	M5X20
05596-10-2112356033	A	open-u	22	26,1	23	39,2	3,8	42,9	3,8	12,7	7,2	270	50	Parallel Grip	12-17	M5X16
05596-10-2117356033	A	open-u	22	26,1	23	39,2	3,8	42,9	3,8	12,7	7,2	270	50	Parallel Grip	17-22	M5X20
05596-10-2102356001	A	dk0080	22	26,1	23	39,2	14	42,9	3,8	12,7	7,2	270	50	Parallel Grip	2-7	M5X16
05596-10-2107356001	A	dk0080	22	26,1	23	39,2	14	42,9	3,8	12,7	7,2	270	50	Parallel Grip	7-12	M5X20
05596-10-2112356001	A	dk0080	22	26,1	23	39,2	3,8	42,9	3,8	12,7	7,2	270	50	Parallel Grip	12-17	M5X16
05596-10-2117356001	A	dk0080	22	26,1	23	39,2	3,8	42,9	3,8	12,7	7,2	270	50	Parallel Grip	17-22	M5X20
05596-10-2002356000	B	9-pin	22	26,2	23	39,2	14	42,9	3,8	12,7	7,2	270	50	Parallel Grip	2-7	M5X16
05596-10-2007356000	B	9-pin	22	26,2	23	39,2	14	42,9	3,8	12,7	7,2	270	50	Parallel Grip	7-12	M5X20
05596-10-2012356000	B	9-pin	22	26,2	23	39,2	3,8	42,9	3,8	12,7	7,2	270	50	Parallel Grip	12-17	M5X16
05596-10-2017356000	B	9-pin	22	26,2	23	39,2	3,8	42,9	3,8	12,7	7,2	270	50	Parallel Grip	17-22	M5X20
05596-10-2002356022	B	external thread	22	26,2	23	39,2	14	42,9	3,8	12,7	7,2	270	50	Parallel Grip	2-7	M5X16
05596-10-2007356022	B	external thread	22	26,2	23	39,2	14	42,9	3,8	12,7	7,2	270	50	Parallel Grip	7-12	M5X20
05596-10-2012356022	B	external thread	22	26,2	23	39,2	3,8	42,9	3,8	12,7	7,2	270	50	Parallel Grip	12-17	M5X16
05596-10-2017356022	B	external thread	22	26,2	23	39,2	3,8	42,9	3,8	12,7	7,2	270	50	Parallel Grip	17-22	M5X20
05596-10-2002356033	B	open-u	22	26,2	23	39,2	14	42,9	3,8	12,7	7,2	270	50	Parallel Grip	2-7	M5X16
05596-10-2007356033	B	open-u	22	26,2	23	39,2	14	42,9	3,8	12,7	7,2	270	50	Parallel Grip	7-12	M5X20
05596-10-2012356033	B	open-u	22	26,2	23	39,2	3,8	42,9	3,8	12,7	7,2	270	50	Parallel Grip	12-17	M5X16
05596-10-2017356033	B	open-u	22	26,2	23	39,2	3,8	42,9	3,8	12,7	7,2	270	50	Parallel Grip	17-22	M5X20
05596-10-2002356001	B	dk0080	22	26,2	23	39,2	14	42,9	3,8	12,7	7,2	270	50	Parallel Grip	2-7	M5X16
05596-10-2007356001	B	dk0080	22	26,2	23	39,2	14	42,9	3,8	12,7	7,2	270	50	Parallel Grip	7-12	M5X20
05596-10-2012356001	B	dk0080	22	26,2	23	39,2	3,8	42,9	3,8	12,7	7,2	270	50	Parallel Grip	12-17	M5X16
05596-10-2017356001	B	dk0080	22	26,2	23	39,2	3,8	42,9	3,8	12,7	7,2	270	50	Parallel Grip	17-22	M5X20