Item description/product images





Description

Material:

Electrically conductive polyoxymethylene (POM).

Version:

Flexible hose, black. Accessories, black.

Note:

Flexible hose for extracting swarf, smoke, lubricant mist, steam, gases and other media; can be connected to a central extraction system or an industrial vacuum cleaner. It can be extended and shortened as needed. Free hanging lengths of up to 100 cm are possible without the need for support; 360° loops can be formed with a radius of 150 mm. Precise adjustment, vibration resistant, position reliability. Combinable with nozzles and accessories as required.


Resistant to: acids below 65 °C, alcohols, aromatic solvents, petrol, grease, hydrocarbons, oil, saline solutions.

Not resistant to: chlorine, acetone, chlorinated solvents, strong bases, ethyl acetate, water above 65 °C.

Antistatic and electric properties: specific surface resistivity: 1000 E3 Ω specific electrical resistance: < 6000 E2 Ω

Temperature range:

Maximum temperature 80 °C. The melting point is 165 °C.

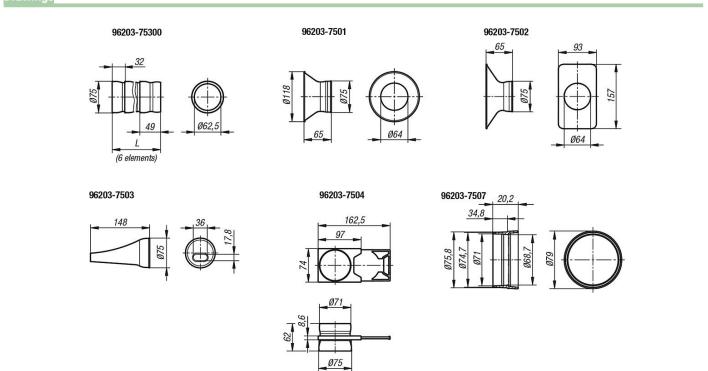

96203 Suction hoses LOC-LINE® Flexi 75 antistatic



Overview of items

Order No.	Article description	Item	Version 1	Image
96203-75300	FLEXIBLE HOSE SIZE:75 L=300, BLACK	Base / magnet 245014 Assembly / Clamping joint 242051 Fixing element / dial gauge holder 246018		. In the second
96203-7501	ROUND NOZZLE SIZE:75	Base / magnet 245014 Assembly / Clamping joint 242051 Fixing element / dial gauge holder 246028		
96203-7502	RECTANGULAR NOZZLE SIZE:75	grip powder-coated without nut		
96203-7503	OVAL NOZZLE CONICAL SIZE:75	Grip Rod	cumulus green	
96203-7504	GATE VALVE SIZE:75	Grip Screw		
96203-7507	ADAPTER FÜR BLECHROHR SIZE:75 PLASTIC	bayonet lock		0