

Item description/product images



Description

Material:

Housing and nut die-cast zinc. Grip plastic PA6 GF 30. Flat seal rubber.

Version:

Housing and nut chrome-plated. Grip black.

Note:

Quarter-turn lock with wing grip. Right or left deployment. The lock can be installed pre-assembled. The fastening nut is an earthing nut with teeth one side.

Water and dust tight according to IP65.

The cylinder locks are supplied with 2 keys. The key can be removed in both positions (open and closed). All cylinders are identical i.e. all locks can be opened with the same key (Euro key 5333).

Please order the desired tongue type separately. Every tongue can be combined with every housing.

*Dimension A results from the combination of the quarter turn lock and the tongue and is specified with the matching tongues.


Accessory:

Tongue for steel quarter-turn lock 05569.

© norelem www.norelem.com



Drawings

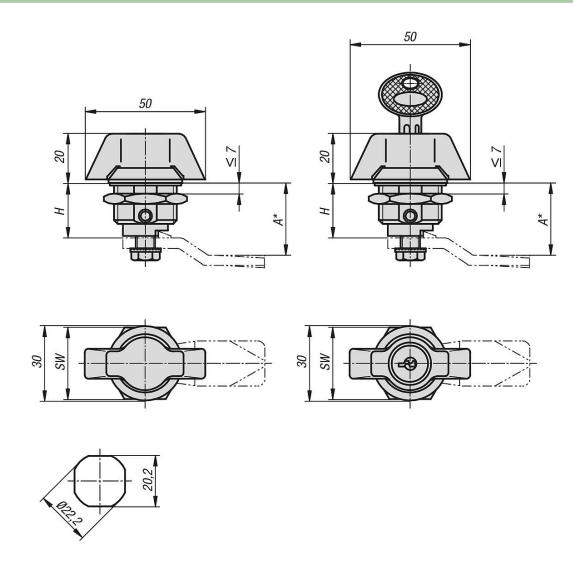

Overview of items

Order No.	Actuation	Н	SW
05571-01-11	20 x ball joint ModuLine ML-20-6 Art. 241211, 4 x ball joint ML-40 Art. 241227 40 x extension ModuLine ML-20-50 Art. 245800, 10 x swivel joint ModuLine TurnStop ML-100 Art. 241200, 10 x function head ModuLineML-20 Art. 245700	18,5	27
05571-01-21	20-90 non-condensing	18,5	27

© norelem