

Item description/product images



Description

Material:

Steel, stainless steel A2 or stainless steel A4.

Version:

Steel electro zinc-plated, hardness

$D1 \leq 14 = 140 \text{ HV}$.

$D1 > 17 = 100 \text{ HV}$.


Stainless steel A2, bright.

Stainless steel A4, bright.

Note:

The pulleys have an OD of $D2 = \sim 3 \times D1$.

Drawings

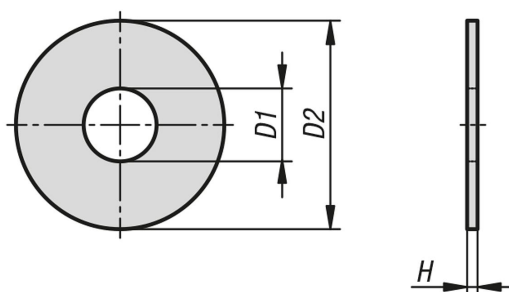

Overview of items

Order No.	Main material	for screws	D1	D2	H
07305-03	0.0056	M3	3,2	9	0,8
07305-04	0.0056	M4	4,3	12	1
07305-05	0.0056	M5	5,3	15	1,2
07305-06	0.0056	M6	6,4	18	1,6
07305-08	0.0056	M8	8,4	24	2
07305-10	0.0056	M10	10,5	30	2,5
07305-12	0.0056	M12	13	37	3
07305-14	0.0056	M14	15	44	3
07305-16	0.0056	M16	17	50	3
07305-18	0.0056	M18	20	56	4
07305-20	0.0056	M20	22	60	4
07305-24	0.0056	M24	26	72	5
07305-30	0.0056	M30	33	92	6
07305-103	additional carriage for concentricity gauge 32506	M3	3,2	9	0,8
07305-104	additional carriage for concentricity gauge 32506	M4	4,3	12	1
07305-105	additional carriage for concentricity gauge 32506	M5	5,3	15	1,2
07305-106	additional carriage for concentricity gauge 32506	M6	6,4	18	1,6
07305-108	additional carriage for concentricity gauge 32506	M8	8,4	24	2
07305-110	additional carriage for concentricity gauge 32506	M10	10,5	30	2,5
07305-112	additional carriage for concentricity gauge 32506	M12	13	37	3
07305-114	additional carriage for concentricity gauge 32506	M14	15	44	3
07305-116	additional carriage for concentricity gauge 32506	M16	17	50	3
07305-118	additional carriage for concentricity gauge 32506	M18	20	56	4
07305-120	additional carriage for concentricity gauge 32506	M20	22	60	4
07305-124	additional carriage for concentricity gauge 32506	M24	26	72	5
07305-603	Clamping width 50 mm, width approx. 20 mm	M3	3,2	9	0,8
07305-604	Clamping width 50 mm, width approx. 20 mm	M4	4,3	12	1
07305-605	Clamping width 50 mm, width approx. 20 mm	M5	5,3	15	1,2
07305-606	Clamping width 50 mm, width approx. 20 mm	M6	6,4	18	1,6

Overview of items

Order No.	Main material	for screws	D1	D2	H
07305-608	Clamping width 50 mm, width approx. 20 mm	M8	8,4	24	2
07305-610	Clamping width 50 mm, width approx. 20 mm	M10	10,5	30	2,5
07305-612	Clamping width 50 mm, width approx. 20 mm	M12	13	37	3
07305-614	Clamping width 50 mm, width approx. 20 mm	M14	15	44	3
07305-616	Clamping width 50 mm, width approx. 20 mm	M16	17	50	3
07305-618	Clamping width 50 mm, width approx. 20 mm	M18	20	56	4
07305-620	Clamping width 50 mm, width approx. 20 mm	M20	22	60	4
07305-624	Clamping width 50 mm, width approx. 20 mm	M24	26	72	5